



Sample it. Label it!

A printer designed specifically for your labelling needs

With Brady's LABXPRT™ V2.0 Laboratory Labelling System, you have a powerful yet affordable tool at your fingertips! Produce legible, professional looking labels for your lab samples, while drastically reducing the time it actually takes to label.

Increase the efficiency of labelling in your laboratory with:

- 21 font sizes
- USB port for PC Connection
- Narrow bar code width to allow more characters on smaller labels
- Pre-sized labels customised to fit vials, tubes, and slides
- Auto-serialisation – produce 40 labels in under two minutes – that's 80% faster than handwriting!
- One-touch Time & Date stamping
- Built-in bar coding
- Over 140 lab-specific Greek, research, and safety symbols

Imagine labels designed specifically for your harshest environment

Brady labels have been tested to stand up to your toughest, most extreme conditions. They won't fall off, crack, or peel. The labels preserve the integrity of your most important specimens – indefinitely.

Labels are designed to withstand:

- Extreme temperatures: Liquid Nitrogen (-196°C), through Autoclave (+121°C)
- Harsh solvents: Xylene, Ethanol, DMSO, IPA
- Moisture: Labels remain intact and legible through hot water bath, humidity, and repeated handling
- Jamming: Low-profile materials will not get stuck in a centrifuge or other equipment



Handwritten labels: smeared, torn, hard to read

See the difference with the Brady LABXPRT V2.0 Laboratory Labelling System

Imagine the perfect label – perfectly legible

Completely eliminate the risk of labels that are indecipherable due to poor or smudged handwriting. You'll never have to question what's inside your vessel or who did the work.

- Crisp, clear, legible printing even on the smallest labels using the smallest fonts
- Won't smear from handling or harsh chemicals
- Range of type sizes from 1 mm to 32 mm
- Can be bar coded

Imagine a LABXPRT V2.0 system with even more capabilities

If you really want to increase efficiency and speed in labelling, connect your LABXPRT V2.0 system to your Windows®-based PC and use the optional Identilab™ Software to create labels on your PC and download database information.

- USB port connectivity
- Easy interface with spreadsheets and many other programs
- Increase your text options with more fonts, symbols, and sizes
- Work in an easy "click and drag" environment



Innovative Drop, Lock, and Print Smart Cartridge quickly and easily loads, so it takes no time at all to switch labelling jobs!



Imagine PC software designed specifically for laboratory users

Create files and templates with the easy-to-use wizards in Identilab. Hundreds of parts and graphics are categorised by common lab applications, including superscript and subscript characters. Database import, automatic text formatting, multi-label data entry view, and 2-D bar codes are just a few of the capabilities of Identilab and, Identilab software is quick and easy to use – just three simple steps until your labels print from any Windows®-based printer.

Identilab Label Creation Software



Part Number: IDL

051961 – Identilab – single user version
051963 – Identilab – site license

Application Index

Here is a quick reference to locate labels for your application:	Page
Centrifuge, Eppendorf, PCR Tube Labels	5
Cryo Vials & Tubes	6
Vial Top Labels	7
Conicals & Large Tube Labels	8
Well Plate Label	9
Slide Labels	9
Straw Labels	9
Bottles, Flasks, Dishes and General Lab ID	10
Cryo-Cane Label	10
Drawers, Shelves, Cabinets and Lab Facility ID	11

IMAGINE solutions for all your labelling needs

Printer Information

There's a LABXPRT™ V2.0 labelling system package to fit your application needs.

Order Reference	Description
LABXPRT V2.0 Printer & Accessories	
805540	LABXPRT V2.0 + IDENTILAB S/WARE-SINGLE USER
060900	LABXPRT V2.0 LAB LABELLING SYSTEM **
060902	HARD CASE FOR LABXPRT V2.0 PRINTER
800747 (for Europe)	(SPARE) AC ADAPTER for LABXPRT V2.0
800746 (for UK)	(SPARE) AC ADAPTER for LABXPRT V2.0
Identilab Laboratory Labelling Software	
051961	IDENTILAB LAB ID SOFTWARE-SINGLE USER
051963	IDENTILAB LAB ID SOFTWARE-SITE (4+ USERS)

* Ships with: printer, AC power supply, USB PC cable, XSL-86-461 supply cartridge, CD containing manuals and driver.

FREE V2.0 Upgrade: If you have purchased a Handheld Labeler before 1st June 2007, go to www.bradyeurope.com to download your FREE V2.0 firmware. Use the standard PC cable supplied with your printer for upgrading and printing from a PC.



Label Installation Styles

The right label, properly installed, will give you maximum performance. Here are descriptions of the label styles found on the following pages.



Free Standing Label Style

- Label does not wrap around to overlap itself
- Provides window to view liquid level inside vial



Short Overlap Label Style

- "All-White" label wraps around vial to slightly overlap itself
- Does not provide window to view liquid level inside vial



Short-Tail Overlap Label Style

- Label wraps completely around vial but clear tail only overlaps slightly to maintain lowest profile and easier handling
- Provides window to view liquid level inside vial



Long-Tail Overlap Label Style

- Label wraps completely around vial and clear tail extends over text for additional solvent and handling resistance
- Provides window to view liquid level inside vial



Centrifuge, Eppendorf, PCR Tube Labels

B-461 High Performance Lab Polyester



WITHSTANDS:

- Liquid nitrogen (-196°C)
- Freezer (-80°C)
- Hot water bath (+100°C)
- Autoclave (+121°C)

Designed for use in labs, this material has an ultra-thin construction that prevents vials from jamming in the centrifuge or racks. It stays put in the harshest conditions, and the clear tail can be wrapped over text for added protection from solvents. For use in liquid nitrogen, label must wrap around vial and slightly overlap itself. Long and short-tail styles provide window for viewing liquid level in tube.



Vial Size	Diagram	Order Reference	Labels per Cartridge	Dimensions – mm			Install Style (See page 4)
A	B	C					
LONG-TAIL STYLE – text covered for solvent resistance							
0.2 ml PCR tube	▶	XSL-108-461	500	4.75	38.10	17.78	Long-Tail
0.5 to 0.7 ml	▶	XSL-72-461	225	12.70	44.45	19.05	Long-Tail
1.5 to 2.0 ml	▶	XSL-74-461	175	12.70	55.88	19.05	Long-Tail
1.5 to 2.0 ml (larger text area)	▶	XSL-86-461	150	15.24	66.68	25.40	Long-Tail
SHORT-TAIL STYLE – lowest profile, easier handling							
0.5 to 0.7 ml	▶	XSL-123-461	500	9.53	28.58	19.05	Short-Tail
0.5 to 0.7 ml (larger text area)	▶	XSL-122-461	500	12.70	28.58	19.05	Short-Tail
1.5 to 2.0 ml	▶	XSL-124-461	225	12.70	41.91	19.05	Short-Tail
1.5 to 2.0 ml (larger text area)	▶	XSL-126-461	225	15.24	45.72	25.40	Short-Tail
CONTINUOUS WRAP STYLE – use w/vial templates in LABXPRT V2.0, no window to see liquid level							
0.5 to 0.7 ml Short Overlap	⊙	XC-375-461		9.1 m	9.53		
0.5 to 2.0 ml Short Overlap	⊙	XC-500-461		9.1 m	12.70		





B-492 FreezerBondz™ Material

WITHSTANDS:

- Liquid nitrogen (-196°C)
- Freezer (-80°C)
- Sticks to frozen/frosted surfaces
- Hot water bath (+100°C)
- Autoclave (+121°C)

If you ever need to put a label on an already-frozen vial, this material will adhere to a frozen or frosted surface without the need to scrape or dry the vial before placement of the label. To activate adhesion to the frost and to be assured that the label stays secured when placed back into storage, it is recommended that the label be pressed in place and held for 3 seconds.

Vial Size	Diagram	Order Reference	Labels per Cartridge	Dimensions – mm			Install Style (See page 4)
A	B	C					
0.5 to 0.7 ml	▲	X-130-492	275	21.00	9.53		Free Standing
1.5 to 2.0 ml	▲	X-131-492	225	25.40	12.70		Free Standing
1.5 to 2.0 ml	⋈	X-118-492	300	25.40	9.53	9.53	Free Standing
1.5 to 2.0 ml	⋈	X-120-492	300	25.40	12.70	9.53	Free Standing
1.5 to 2.0 ml	⋈	X-117-492	300	25.40	12.70	11.18	Free Standing
1.0 to 8.0 ml	⊙	XC-500-492		9,1 m	12,70		





B-499 Nylon Cloth Material

WITHSTANDS:

- Freezer (-80°C)
- Autoclave (+121°C)
- Liquid nitrogen (-196°C)

The permanent adhesive and thicker construction makes this material easy to handle. Great for general purpose lab I.D. and harsh conditions. Not suitable for use on glass in liquid nitrogen.

Vial Size	Diagram	Order Reference	Labels per Cartridge	Dimensions – mm			Install Style (See page 4)
A	B	C					
0.5 to 0.7 ml	▲	X-130-499	275	20.96	9.53		Free Standing
0.5 to 0.7 ml	⋈	X-118-499	300	25.40	9.53	9.53	Short Overlap
0.5 to 0.7 ml	⋈	X-120-499	300	25.40	12.70	9.53	Short Overlap
1.5 to 2.0 ml	▲	X-131-499	225	25.40	12.70		Free Standing
1.5 to 2.0 ml	⋈	X-118-499	300	25.40	9.53	9.53	Free Standing
1.5 to 2.0 ml	⋈	X-120-499	300	25.40	12.70	9.53	Free Standing
1.5 to 2.0 ml	⋈	X-117-499	300	25.40	12.70	11.18	Free Standing



IMAGINE not hand writing labels

Cryo Tube Labels

B-461 High Performance Lab Polyester




WITHSTANDS:

- Liquid nitrogen (-196°C)
- Freezer (-80°C)
- Hot water bath (+100°C)
- Autoclave (+121°C)

Designed for use in labs, this material has an ultra-thin construction that prevents vials from jamming in the centrifuge or racks. It stays put in the harshest conditions, and the clear tail can be wrapped over text for added protection from solvents. For use in liquid nitrogen, label must wrap around vial and slightly overlap itself.



Vial Size	Diagram	Order Reference	Labels per Cartridge	Dimensions – mm			Install Style (See page 4)
A	B	C					
LONG-TAIL STYLE – text covered for solvent resistance							
0.6 ml		XSL-72-461	225	12.70	44.45	19.05	Long-Tail
1.0 to 8.0 ml		XSL-74-461	175	12.70	55.88	19.05	Long-Tail
1.0 to 8.0 ml (larger text area)		XSL-86-461	150	15.24	66.68	25.40	Long-Tail
1.0 to 8.0 ml (larger text area)		XSL-75-461	150	25.40	66.68	25.40	Long-Tail
12 to 14 ml		XSL-119-461	100	38.10	95.25	31.75	Long-Tail
SHORT-TAIL STYLE – lowest profile, easier handling							
0.6 ml		XSL-123-461	500	9.53	28.58	19.05	Short-Tail
0.6 ml		XSL-122-461	500	12.70	28.58	19.05	Short-Tail
1.0 to 8.0 ml		XSL-72-461	225	12.70	44.45	19.05	Short-Tail
1.0 to 8.0 ml (larger text area)		XSL-126-461	225	15.24	45.72	25.40	Short-Tail
1.0 to 8.0 ml (larger text area)		XSL-125-461	225	25.40	44.45	25.40	Short-Tail
12 to 24 ml		XSL-129-461	175	38.10	57.15	31.75	Short-Tail
CONTINUOUS WRAP STYLE – use w/vial templates in LABXPRT V2.0, no window to see liquid level							
0.6 ml		XC-375-461		9.1 m	9.53		Short Overlap
0.6 to 2.0 ml		XC-500-461		9.1 m	12.70		Short Overlap
1.0 to 8.0 ml		XC-1000-461		9.1 m	25.40		Short Overlap
4.0 to 24 ml		XC-1250-461		9.1 m	31.75		Short Overlap





B-492 FreezerBondz™ Material

WITHSTANDS:

- Liquid nitrogen (-196°C)
- Freezer (-80°C)
- Sticks to frozen/frosted surfaces
- Hot water bath (+100°C)
- Autoclave (+121°C)

If you ever need to put a label on an already-frozen vial, this material will adhere to a frozen or frosted surface without the need to scrape or dry the vial before placement of the label. To activate adhesion to the frost and to be assured that the label stays secured when placed back into storage, it is recommended that the label be pressed in place and held for 3 seconds.

Vial Size	Diagram	Order Reference	Labels per Cartridge	Dimensions – mm		Install Style (See page 4)
A	B					
0.6 ml		X-130-492	275	21.00	9.53	Free Standing
1.0 to 8.0 ml		X-131-492	225	25.40	12.70	Free Standing
1.0 to 8.0 ml		X-156-492	225	22.86	25.40	Free Standing
1.0 to 8.0 ml		XC-500-492		9.1 m	12.70	
12 to 24 ml		X-78-492	125	48.26	25.40	Free Standing





B-499 Nylon Cloth Material

WITHSTANDS:

- Freezer (-80°C)
- Autoclave (+121°C)
- Liquid nitrogen (-196°C)

The permanent adhesive and thicker construction makes this material easy to handle. Great for general purpose lab I.D. and harsh conditions. Not suitable for use on glass in liquid nitrogen.

Vial Size	Diagram	Order Reference	Labels per Cartridge	Dimensions – mm		Install Style (See page 4)
A	B					
0.6 ml		X-130-499	275	20.96	9.53	Free Standing
1.0 to 8.0 ml		X-131-499	225	25.40	12.70	Free Standing
12 to 24 ml		X-132-499	200	31.75	38.10	Free Standing



Vial Top Labels

B-492 FreezerBondz™ Material



WITHSTANDS:

- Liquid nitrogen (-196°C)
- Freezer (-80°C)
- Sticks to frozen/frosted surfaces
- Hot water bath (+100°C)
- Autoclave (+121°C)

If you ever need to put a label on an already-frozen vial, this material will adhere to a frozen or frosted surface without the need to scrape or dry the vial before placement of the label. To activate adhesion to the frost and to be assured that the label stays secured when placed back into storage, it is recommended that the label be pressed in place and held for 3 seconds.



Vial Size	Diagram	Order Reference	Labels per Cartridge	Dimensions – mm			Colour
A	B	C					
0.6 to 1.5 ml		X-82-492	300	9.53			BK on WT
0.6 to 1.5 ml		X-118-492	300	25.40	9.53	9.53	BK on WT
0.6 to 1.5 ml		X-120-492	300	25.40	12.70	9.53	BK on WT
1.0 to 2.0 ml		X-83-492	300	12.70			BK on WT
1.0 to 2.0 ml		X-118-492	300	25.40	9.53	9.53	BK on WT
1.0 to 2.0 ml		X-120-492	300	25.40	12.70	9.53	BK on WT
1.0 to 2.0 ml		X-117-492	300	25.40	12.70	11.18	BK on WT





B-499 Nylon Cloth Material

WITHSTANDS:

- Freezer (-80°C)
- Autoclave (+121°C)
- Liquid nitrogen (-196°C)

The permanent adhesive and thicker construction makes this material easy to handle. Great for general purpose lab I.D. and harsh conditions. Not suitable for use on glass in liquid nitrogen.

Vial Size	Diagram	Order Reference	Labels per Cartridge	Dimensions – mm			Colour
A	B	C					
0.6 to 1.5 ml		X-82-499	300	9.530			BK on WT
0.6 to 1.5 ml		X-82-499-YL-BK	300	9.530			BK on YL
0.6 to 1.5 ml		X-82-499-OR-BK	300	9.530			BK on OR
0.6 to 1.5 ml		X-82-499-RD-BK	300	9.530			BK on RD
0.6 to 1.5 ml		X-118-499	300	25.40	9.53	9.53 dia	BK on WT
0.6 to 1.5 ml		X-120-499	300	25.40	12.70	9.53 dia	BK on WT
1.0 to 2.0 ml		X-83-499	300	12.70			BK on WT
1.0 to 2.0 ml		X-83-499-YL-BK	300	12.70			BK on YL
1.0 to 2.0 ml		X-83-499-OR-BK	300	12.70			BK on OR
1.0 to 2.0 ml		X-83-499-RD-BK	300	12.70			BK on RD
1.0 to 2.0 ml		X-118-499	300	25.40	9.53	9.53 dia	BK on WT
1.0 to 2.0 ml		X-120-499	300	25.40	12.70	9.53 dia	BK on WT
1.0 to 2.0 ml		X-117-499	300	25.40	12.70	11.18 dia	BK on WT



IMAGINE labels that last

Conical & Large Tube Labels

B-461 High Performance Lab Polyester



WITHSTANDS:

- Liquid nitrogen (-196°C)
- Freezer (-80°C)
- Hot water bath (+100°C)
- Autoclave (+121°C)

Designed for use in labs, this material has an ultra-thin construction that prevents vials from jamming in the centrifuge or racks. It stays put in the harshest conditions, and the clear tail can be wrapped over text for added protection from solvents. For use in liquid nitrogen, label must wrap around vial and slightly overlap itself.



Conical Size	Diagram	Order Reference	Labels per Cartridge	Dimensions – mm			Install Style (See page 4)
LONG-TAIL STYLE – text covered for solvent resistance							
14 to 15 ml Conical	▶	XSL-119-461	100	38.10	95.25	31.75	Long-Tail
SHORT-TAIL STYLE – lowest profile, easier handling							
14 to 15 ml Conical	▶	XSL-129-461	175	38.10	57.15	31.75	Short-Tail
50 ml Conical	▶	XSL-119-461	100	38.10	95.25	31.75	Short-Tail
CONTINUOUS WRAP STYLE – use w/vial templates in LABXPERT V2.0, no window to see liquid level							
Conicals	⊙	XC-1000-461		9.1 m	25.40		Short Overlap
Conicals	⊙	XC-1250-461		9.1 m	31.75		Short Overlap





B-492 FreezerBondz™ Material

WITHSTANDS:

- Liquid nitrogen (-196°C)
- Freezer (-80°C)
- Hot water bath (+100°C)
- Autoclave (+121°C)
- Sticks to frozen/frosted surfaces

If you ever need to put a label on an already-frozen vial, this material will adhere to a frozen or frosted surface without the need to scrape or dry the vial before placement of the label. To activate adhesion to the frost and to be assured that the label stays secured when placed back into storage, it is recommended that the label be pressed in place and held for 3 seconds.

Conical Size	Diagram	Order Reference	Labels per Cartridge	Dimensions – mm		Install Style (See page 4)
14 to 15 ml Conical	★	X-156-492	225	22.86	25.40	Free Standing
50 ml Conical	▲	X-78-492	125	48.26	25.40	Free Standing




B-499 Nylon Cloth Material

WITHSTANDS:

- Freezer (-80°C)
- Autoclave (+121°C)
- Liquid nitrogen (-196°C)

The permanent adhesive and thicker construction makes this material easy to handle. Great for general lab I.D. and harsh conditions. Not suitable for use on glass in liquid nitrogen.

Conical Size	Diagram	Order Reference	Labels per Cartridge	Dimensions – mm		Install Style (See page 4)
14 to 15 ml Conical	★	X-132-499	200	31.75	38.10	Free Standing
50 ml Conical	★	X-78-499	125	25.40	48.26	Free Standing



Well Plate Label


B-488 Chemical Resistant Lab Polyester

WITHSTANDS:

- Xylene
- IPA
- DMSO
- Freezer (-80°C)
- Ethanol
- Autoclave (+121°C)

With permanent adhesion, outstanding chemical resistance, and write-on capabilities, this material performs in the very harshest lab environments.

Well Plates	Diagram	Order Reference	Labels per Cartridge	Dimensions – mm	
				A	B
	▲	X-81-488	200	48.26	6.35



Slide Labels


B-488 Chemical Resistant Lab Polyester

WITHSTANDS:

- Xylene
- Freezer (-80°C)
- DMSO
- Autoclave (+121°C)
- Ethanol

Created specifically for labelling slides, this material offers permanent adhesion, outstanding chemical resistance, and write-on capabilities.

Slide Size	Diagram	Order Reference	Labels per Cartridge	Dimensions – mm	
				A	B
Standard Slides	▲	X-97-488	350	22.86	22.86
Oversized Slides	▲	X-81-488	200	48.26	6.35



Straw Labels




B-427 Vinyl Material

WITHSTANDS:

- Liquid nitrogen (-196°C)
Not suitable for use on glass in liquid nitrogen.
- Freezer (-80°C)
Not suitable for high temperature applications.

Pliable and durable, this material is designed to wrap around and adhere to small diameter curved surfaces, such as straws. The clear "tail" wraps over the text for added protection.

Straw Size	Diagram	Order Reference	Labels per Cartridge	Dimensions – mm		
				A	B	C
Small straws / 0.25 ml	▶	XSL-133-427	175	44.45	25.40	9.530
Large straws / 0.50 ml	▶	XSL-134-427	175	44.45	38.10	12.70
Straw rod	▲	X-105-427-AW	500	27.94	6.350	

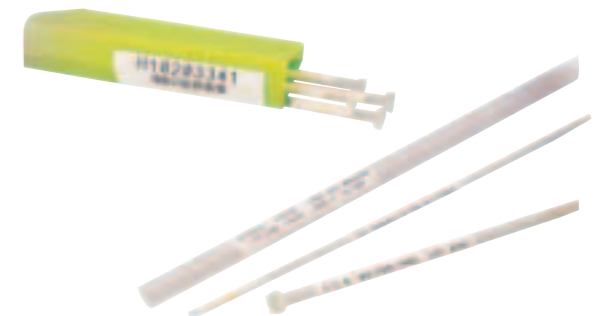

IMAGINE labels remain readable

Bottles, Flasks, Dishes and General Lab ID

B-498 (Removable) and B-499 (Permanent) Cloth Materials

WITHSTANDS:

- Autoclave (+80°C)

SPECIAL PROPERTIES:

- Removable repositionable adhesive (B-498 Vinyl Cloth)
- Permanent adhesive (B-499 Nylon Cloth)

These labels are easy to handle with an aggressive tack that makes them ideal for use on glass flasks, plastic jugs, bottles, goblets, rough surfaces, lab furniture and general purpose lab labelling.





Diagram	Order Reference	Labels per Cartridge	Dimensions – mm	
			A	B
Removable/Repositionable Adhesive:				
▲	X-131-498	225	25.40	12.70
★	X-103-498	200	25.40	31.75
▲	X-78-498	125	25.40	48.26
Permanent Adhesive:				
▲	X-130-499	275	20.96	9.530
★	X-132-499	200	31.75	38.10
▲	X-131-499	225	25.40	12.70
▲	X-78-499	125	25.40	48.26
▲	X-162-499	165	38.10	12.70
▲	X-30-499	300	38.10	19.05

B-432 Clear Polyester Material

SPECIAL PROPERTIES:

- Freezer (-80°C)
- Autoclave (+121°C)
- Clear Label/See-thru properties

When user chooses to print “Transparent labels” text on this label, the label can be applied to the underside of a clear dish and then the text is visible through the top side of the dish. V2.0 LABXPRT printer required.




Diagram	Order Reference	Labels per Cartridge	Dimensions – mm	
			A	B
▲	X-17-432-CL-BK	350	25.40	12.70
▲	X-78-432-CL-BK	100	48.26	25.40

Cryo-Cane Label

B-492 Freezerbondz Material

WITHSTANDS:

- Liquid nitrogen (-196°C)
- Freezer (-80°C)
- Sticks to frozen/frosted surfaces
- Hot water bath (+100°C)
- Autoclave (+121°C)

This label is designed to be immersed into liquid nitrogen. The ends of the label are folded beneath a standard 7.62 mm x 12.70 mm cane top to secure the label.





Diagram	Order Reference	Labels per Cartridge	Dimensions – mm		
			A	B	C
⊗	X-155-492	400	12.70	6.35	9.35

Drawers, Shelves, Cabinets and Lab Facility ID

B-580 Heavy Duty Coloured Vinyl Material

The perfect choice for general labelling of facility, equipment, drawers and cabinets with warning labels, instructions, and reminders. Make sure your message gets noticed with bright colours! This indoor/outdoor material is pliable, sticks very well to rough and uneven surfaces, and has excellent resistance to dirt, oils, grime, and many solvents. Temperature Range: -18°C to 82°C.

Diagram	Order Reference	Labels per Cartridge	Dimensions – mm		Colour
			A	B	
Removable/Repositionable Adhesive:					
⊙	XC-500-580-WT-BK	9.1 m	9.1 m	12.70	BK on WT
⊙	XC-1000-580-WT-BK	9.1 m	9.1 m	25.40	BK on WT
⊙	XC-1500-580-WT-BK	9.1 m	9.1 m	38.10	BK on WT
⊙	XC-500-580-YL-BK	9.1 m	9.1 m	12.70	BK on YL
⊙	XC-1000-580-YL-BK	9.1 m	9.1 m	25.40	BK on YL
⊙	XC-1500-580-YL-BK	9.1 m	9.1 m	38.10	BK on YL
⊙	XC-500-580-GN-WT	9.1 m	9.1 m	12.70	WT on GN
⊙	XC-1000-580-GN-WT	9.1 m	9.1 m	25.40	WT on GN
⊙	XC-1500-580-GN-WT	9.1 m	9.1 m	38.10	WT on GN
⊙	XC-500-580-BL-WT	9.1 m	9.1 m	12.70	WT on BL
⊙	XC-1000-580-BL-WT	9.1 m	9.1 m	25.40	WT on BL
⊙	XC-1500-580-BL-WT	9.1 m	9.1 m	38.10	WT on BL
⊙	XC-500-580-RD-WT	9.1 m	9.1 m	12.70	RD on WT
⊙	XC-1000-580-RD-WT	9.1 m	9.1 m	25.40	RD on WT
⊙	XC-1500-580-RD-WT	9.1 m	9.1 m	38.10	RD on WT
⊙	XC-500-580-WT-RD	9.1 m	9.1 m	12.70	WT on RD
⊙	XC-1000-580-WT-RD	9.1 m	9.1 m	25.40	WT on RD
⊙	XC-1500-580-WT-RD	9.1 m	9.1 m	38.10	WT on RD
⊙	XC-500-580-OR-BK	9.1 m	9.1 m	12.70	BK on OR
⊙	XC-1000-580-OR-BK	9.1 m	9.1 m	25.40	BK on OR
⊙	XC-1500-580-OR-BK	9.1 m	9.1 m	38.10	BK on OR



Labels shown actual size.

IMAGINE an affordable laboratory labelling system that will make your job easier

With Brady's LABXPERT™ V2.0 labelling system you can label your vials, vial tops, slides, well plates and more, quickly and easily, with durable materials designed specifically for the lab environment. The labels will not fall off or smear, can fit more information than handwritten labels, and are always legible.

The LabXpert™ V2.0 wide range of features include:

- Continuous and pre-cut label styles, including round tops, self-laminating labels, and two-label combinations.
- Text won't smear from solvents or repeat handling
- Labels won't crack, peel or fall off in extreme temperatures (-196°C through +121°C).
- Built-in lab applications, including vial templates, time and date stamp, and auto-serialisation for aliquots.
- Mirror image printing for through-dish viewing of specimen labels.
- Bar coding capabilities – linear bar codes (code 39 and 128) and 2D bar codes with PC operation.
- PC connectivity to download your print job.
- 300 dpi print head for extra sharp print resolution on small fonts and bar codes.
- 140 Greek and laboratory symbols.
- AA battery or AC power operation.



LabXpert™ kit – everything you need to start labelling

Contents of the Kit are:

- 1x LabXpert™ Printer
- 1x Identilab™ labelling software
- 1x X-17-432-CL-BK clear labels
- 1x X-130-492 - Freezerbondz™ II labels.

Part number 806803



BRADY Belgium
Industriepark C/3
Lindestraat 20, 9240 Zele
Tel: +32 (0) 52 45 78 11
Fax: +32 (0) 52 45 78 12

BRADY Germany
Otto-Hahn-Str. 5-7,
63225 Langen
Tel: +49 (0) 6103 7598 660
Fax: +49 (0) 6103 7598 670

BRADY UK
Wildmere Industrial Estate
Banbury, Oxon OX16 3JU
Tel: +44 (0) 1295 228 288
Fax: +44 (0) 1295 228 100

BRADY Italy
Via Pitagora 18
20128 Milano
Tel : +39 02 26 00 00 22
Fax : +39 02 25 75 351

Brady France
Parc EURO CIT
45, avenue de l'Europe
59436 Roncq Cedex
Tel: +33 (0) 3 20 76 94 48
Fax: +33 (0) 3 20 76 76 06

BRADY Sweden
Karins Väg 5
194 54 Upplands Väsby
Tel: +46 (0) 8 590 057 30
Fax: +46 (0) 8 590 818 68

BRADY Spain
Carretera de Barcelona, 88
Esc B Entresuelo 9C
08302 Mataro
Tel: +34 900 902 993
Fax: +34 900 902 994

BRADY Hungary
Puskás Tivadar u. 4
2040 Budaörs
Tel: +36 23 500 275
Fax: +36 23 500 276

BRADY Slovakia
Na Pántoch 18
83106 Bratislava
Tel: +421 2 3300 4800
Fax: +421 2 3300 4801

BRADY Norway
Breivika Industrivei 9
6018 Ålesund
Tel: +47 70 19 10 30
Fax: +47 70 19 05 67

BRADY Denmark
Islandsgade 12
5000 Odense C
Tel: + 45 66 14 44 00
Fax: + 45 66 14 44 50

BRADY Turkey
Selvili Sok. No: 3/4
4. Levent Istanbul 34330
Tel: +90 212 264 02 20 /
+90 212 264 02 21
Fax: +90 212 270 83 19

BRADY WORLDWIDE
Australia 612-8717-6300
Brazil 55-11-3686-4720
China (Beijing) 86-10-6788-7799
China (Shanghai) 86-21-6886-3666
China (Wuxi) 86-510-528-2222
Hong Kong 852-2359-3149
Japan 81-45-461-3600
Canada 1-800-263-6179
Korea 82-31-451-6600
Latin America 1-414-540-5560
Malaysia 60-4-646-2700
Mexico 525-399-6963
New Zealand 61-2-8717-2200
Philippines 63-2-658-2077
Singapore 65-6477-7261
Taiwan 886-3-327-7788
Thailand 66-2-793-9200
USA 1-800-537-8791

